
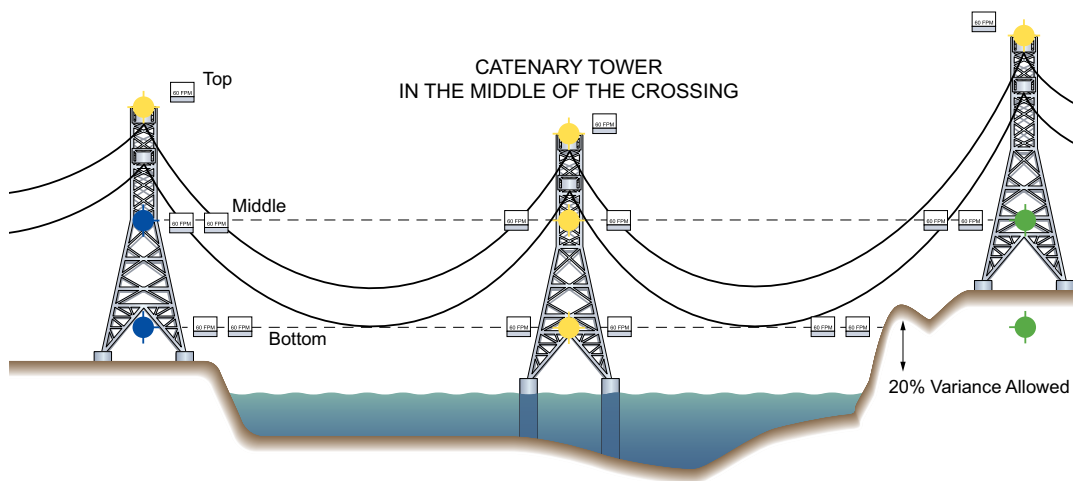



FAA Lighting Catenary


Day Protection = 270,000 cd White Light
 Day Protection = 20,000 cd White Light
 Night Protection = 2,000 cd Red/Infrared Light
 Flash Sequence = Middle | Top | Bottom

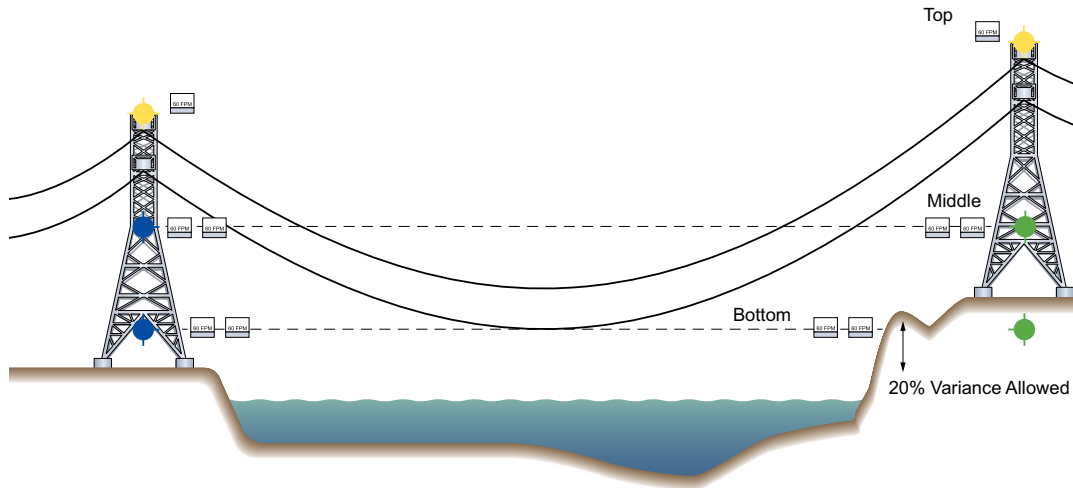


 = L-857 (high intensity white light at 60 fpm with 3 beacons for 360° coverage)

 = L-866 (medium intensity white light at 60 fpm)

 = L-885 (low intensity red/infrared light at 60 fpm)

 = 360° Visibility

 = 180° Visibility (RIGHT)

 = 360° Visibility (LEFT)