


# ICAO Lighting Dual Types A & C

Flashing white medium intensity lights for day, steady red medium intensity for night  
ICAO Annex 14, 8th Edition

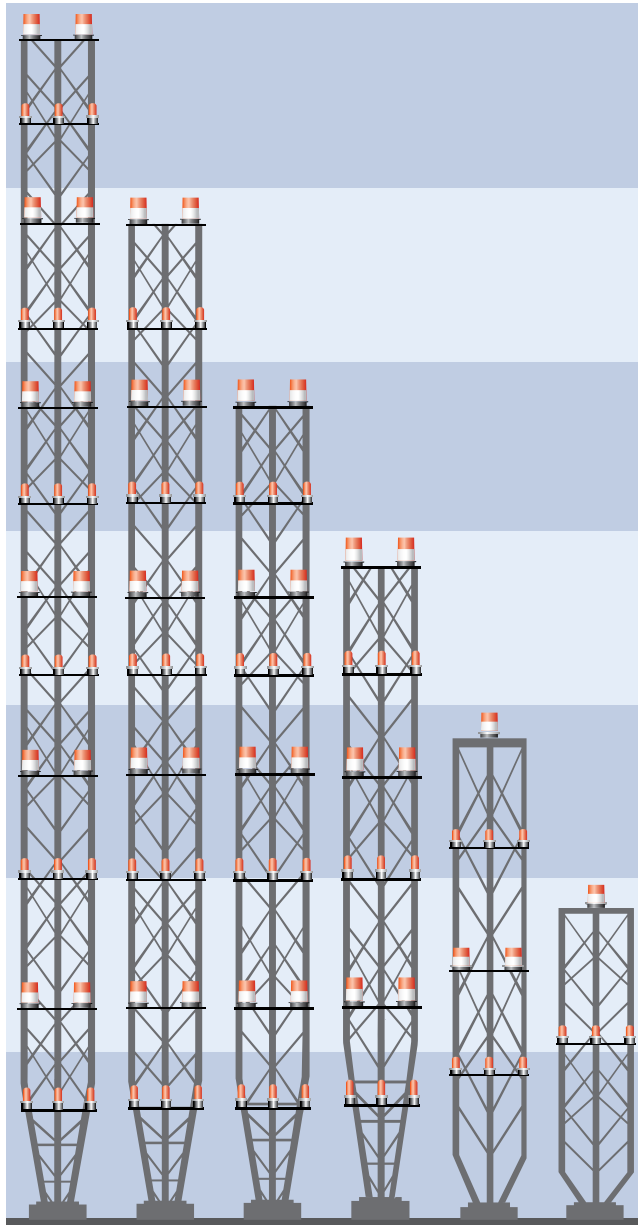

## 525 - 630 m\*

- 13 or more medium intensity type A flashing white and type C steady red beacons
- 12 or more medium intensity type C steady red lights

## 420 - 525 m\*

- 11 or more medium intensity type A flashing white and type C steady red beacons
- 10 or more medium intensity type C steady red lights

## 315 - 420 m\*

- 9 or more medium intensity type A flashing white and type C steady red beacons
- 8 or more medium intensity type C steady red lights

## 210 - 315 m\*

- 7 or more medium intensity type A flashing white and type C steady red beacons
- 6 or more medium intensity type C steady red lights

## 105 - 210 m\*

- 3 or more medium intensity type A flashing white and type C steady red beacons
- 4 or more medium intensity type C steady red lights

## 45 - 105 m\*

- 1 medium intensity type A flashing white and type C steady red beacon
- 2 or more medium intensity type C steady red lights

\* Height including any appurtenances.

High intensity obstacle lighting is recommended on structures of 150 m or more. If medium intensity lighting is used, marking will also be required.