


FAA Lighting A Towers

Type A towers are marked with paint for day and red/infrared lights for night under FAA AC 70/7460-1M.

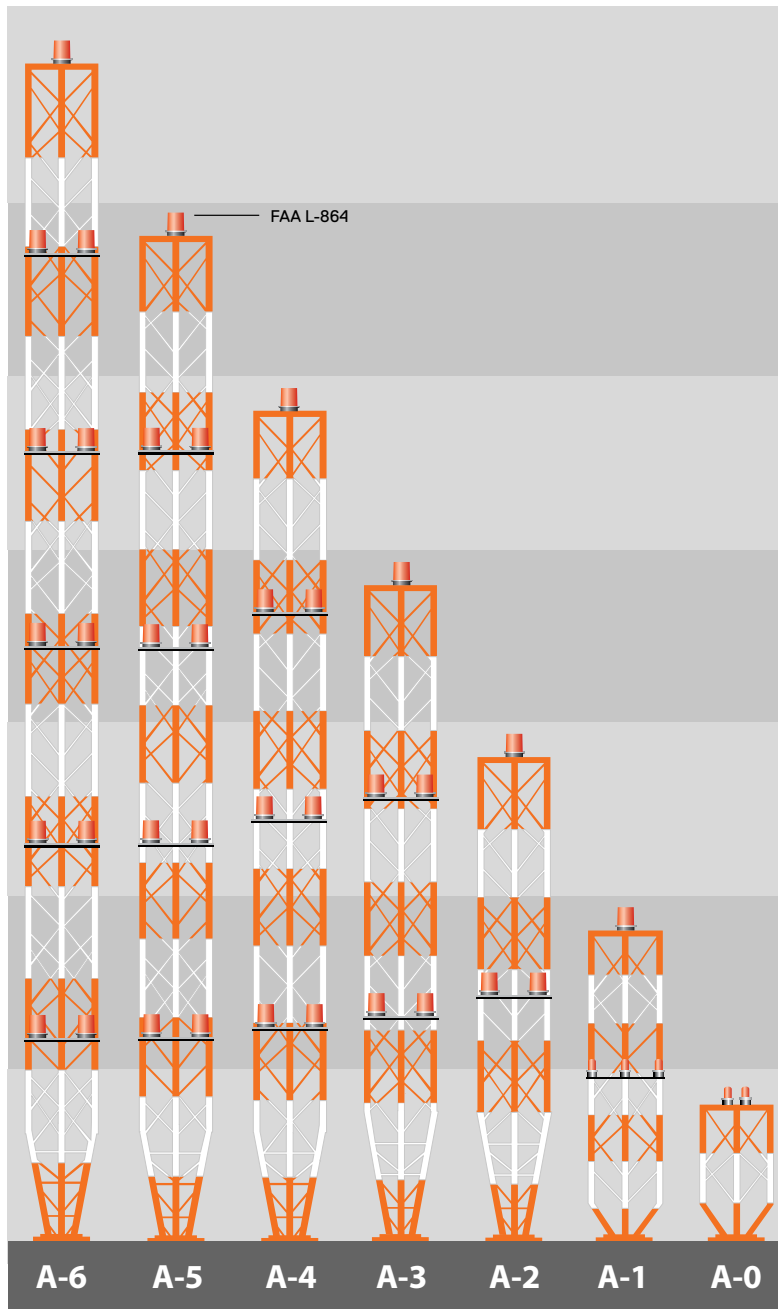

A-6

- Over 1750' including any appurtenances
- 11 L-864 red/infrared medium intensity beacons at 30 fpm

A-5

- Over 1400' but not more than 1750' including any appurtenances
- 9 L-864 red/infrared medium intensity beacons at 30 fpm

A-4

- Over 1050' but not more than 1400' including any appurtenances
- 7 L-864 red/infrared medium intensity beacons at 30 fpm

A-3

- Over 700' but not more than 1050' including any appurtenances
- 5 L-864 red/infrared medium intensity beacons at 30 fpm

A-1

- Over 150' but not more than 350' including any appurtenances
- 1 L-864 red/infrared medium intensity beacon
- 2 or more L-810 red/infrared marker lights configured to flash in sync with L-864 at 30 fpm

A-0

- Less than 150' including any appurtenances
- 1 OL-2 steady-burn red/infrared double obstruction beacon